

Euromod - BT Secondary Telephone Socket



Standards, Approvals & Directives

Conforms to BS 6312 Part 2

2011/65/EC - RoHS Directive

Description

The BT Telephone Secondary outlet has been designed for domestic installations to increase the number of telephone sockets within a given environment.

Features

- Clip-In module for quick and easy installation.
- Black or white modules available

Availability

All Euromod outlets are available for all our collections of wiring accessory plates and can be specified to contain single or multiple outlets depending upon requirement.

The Classic Collection takes advantage of plate mounting the clip-in Euromods, eliminating the use of a grid. Modules are supplied separately.

The Infinity Collection plates and grids are supplied together whereas the modules are supplied separately.



The Penthouse Collection supplies the Euromods, plates and grids individually.

Finishes

The BT module is supplied in either Black or White polycarbonate, complementing the chosen plate finish.

Installation

Carefully strip 25mm of the cable outer sheath to expose the inner conductors

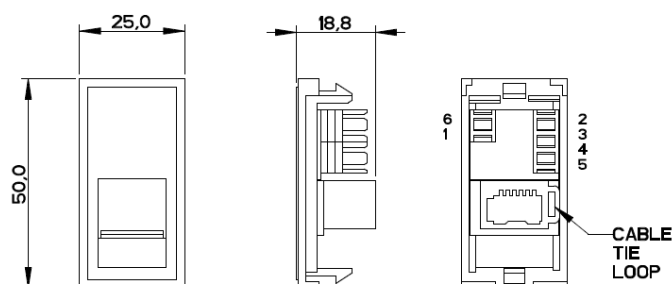

Installation Continued

Using a suitable IDC tool, punch each wire down as per wiring scheme. Check installation as colours may vary. Trim the wire ends

Secure cable to cable tie loop, with cable tie
Do not exceed 50m cable from master socket

Pin	Internal Cabling from Master or to additional Secondaries	Use
1		No Connection
2	BLUE/White	Speech & Ringing
3	ORANGE/White	Ringing
4	WHITE/Orange	Not used connected for neatness
5	WHITE/Blue	Speech & Ringing
6		No Connection

Recommended Box Depth:

25 mm

Metal boxes to BS4662.

Ordering

Interior Euro Module: 3606103 - White

3606104- Black

Please see Wandsworth Electrical catalogue for more information and suitable grid and plate

Tel: +44(0)1483 713 400

Email: sales@wandsworthgroup.com

