


Collection	Finish	Product
Penthouse	Polished Brass	13amp Socket Outlets

Penthouse Collection 13amp Socket Outlets

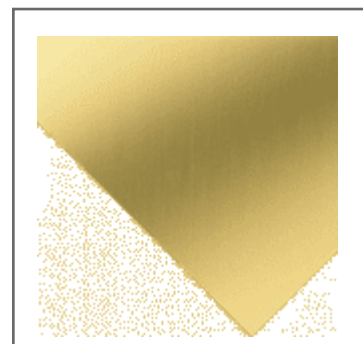

Specified in Polished Brass

Description

A range of socket outlets have been designed for ease of installation, all having the superior quality and design features of The Penthouse Collection. These products can quickly replace an existing 13 amp socket (assuming suitable mounting box is in already in position)

Standards, Approvals & Directives

Comply with BS 1363-2:1995 +A4:2014

(Non-Standard Sockets where relevant.)

Nemko Test Certificate: C12/43399-1

Features

- Matching metal rocker switches available on all switched versions.
- Optional neon indicators in switched socket outlets.
- Un-switched sockets available.
- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.
- Red plastic rocker switches available.

Finishes

All plate finishes are manufactured using 1.5mm solid brass plate that is individually inspected by the Wandsworth Group, a sign of the high standard we have set for the Pent-house Collection. Available plate finishes can be found in the Wandsworth catalogue.

The 13amp sockets are available in Red, Blue, Black and White moulded polycarbonate housings.

Availability

Un-switched:

P14123/*, A14123/* - Single, Rear Entry

P450/*, A450/* - Twin, Rear Entry, Dual Earth

Switched:

P474/*, A474/* - Single, Rear Entry, Single Pole

P454/*, A454/D/* - Twin, Rear Entry, Double Pole, Dual Earth

Neon Switched:

P476/*, A476/* - Single, Rear Entry, Single Pole

P456/*, A456/D/* - Twin, Rear Entry, Double Pole, Dual Earth

Ordering

When ordering please state in tabular form your requirements for plates/ finishes, interior assemblies and boxes.

Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Collection	Finish	Product
Penthouse	Polished Brass	13amp Socket Outlets

TECHNICAL SPECIFICATION

Supply Voltage	Current Rating	Terminal Capacity	Ambient Operating Temperature	IP Rating	Max Installation Altitude
250V AC	13A per Socket Outlet	Live, Neutral & Earth 3 x 2.5mm ² (solid/stranded) 3 x 4mm ² (solid/stranded) 1 x 6mm ² (solid/stranded)	-5°C to +40°C	IP2XD	2000 meters

13Amp Single Switched Neon Socket Outlet

Depth:

Single Un-Switched Socket – 21mm


Single Switched Socket – 21mm

Single Switched Neon Socket – 21mm

Recommended Box Depth:

35mm Metal boxes to BS4662 Single flush box—1702/G (42mm deep)

Not suitable for dry liner/fast-fix or surface boxes

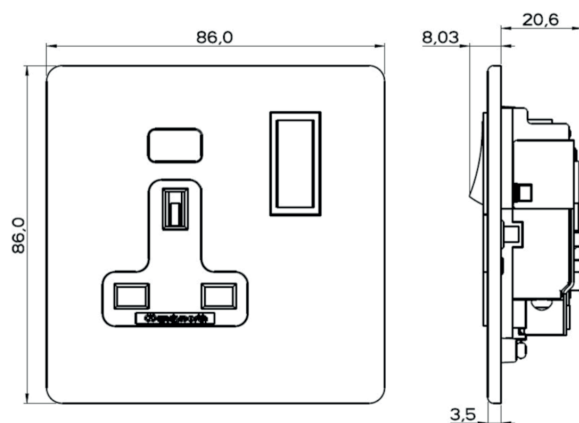

13Amp Twin Switched Socket Outlet

Depth:

Twin Un-Switched Socket – 21mm


Twin Switched Socket – 21mm

Twin Switched Neon Socket – 21mm

Recommended Box Depth:

35mm Metal boxes to BS4662 Twin flush box—1703/G (42mm deep)

Not suitable for dry liner/fast-fix or surface boxes

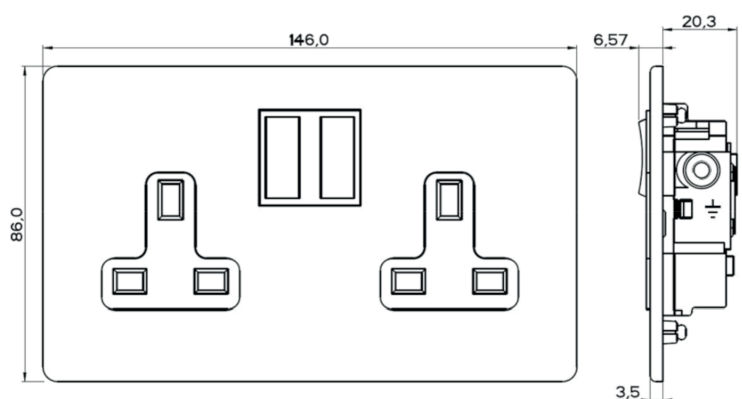

NOTE:

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.