



Collection	Finish	Product	
Classic	TBC	Classic 32 Amp Double Pole Switch	

# Classic Collection Classic 32 Amp Double Pole Switch





## Description

A range of 32amp Double Pole switches have been designed for the connection for domestic cookers and high load devices

All units have been designed with ease of installation in mind and have the advantageous design features and quality of the Classic Collection, complete with red neon indicators.

### Standards, Approvals & Directives

BS EN 60669-11999

Nemko Certificate No: C16/48898

#### **Features**

- The double pole switch has 3mm contact gaps for isolation.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish, alternatively available in white or black plastic rockers
- Neon Indicators

### Ordering

When ordering please state in tabular form your requirements for plates/finishes, interior assemblies and boxes.

#### Catalogue Numbers:

Interiors: A2032/\*/\* - Single Gang

Plates: P2032/\*- Single Plate

/\* Denotes plate, rocker finish

/\*/\* Optional second asterisk denotes Interior colour Standard Interior Colour will apply unless specified , see Wandsworth's catalogue for details

e.g A2032/PB/W

Polished Brass Rocker with White Interior

Recommended Box Depth:

32Amp Double Pole Switch - 42mm


Metal boxes to BS4662


1702/G—Flush single box



Collection	Finish	Product	
Classic	TBC	Classic 32 Amp Double Pole Switch	

	TECHNICAL SPECIFICATION						
Switch Type	Supply Voltage	Current Rating	Terminal Capacity	Ambient Operating Temperature	Max Installation Altitude	IP Rating	No. of Operations
Double Pole	250V AC 50HZ	13A	4 x 1mm <sup>2</sup> 4 x 1.5mm <sup>2</sup> 3 x 2.5mm <sup>2</sup> 2 x 4mm <sup>2</sup> 1 x 6mm <sup>2</sup> 1 x 10m <sup>2</sup>	-5°C to +40°C	2000 meters	IP2XD	10,000

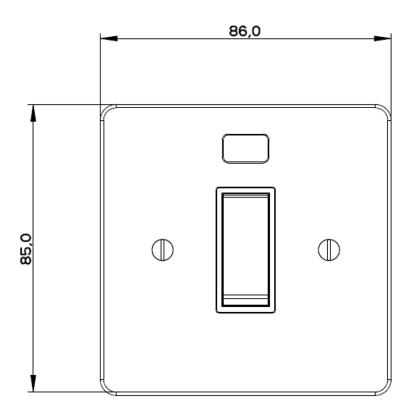

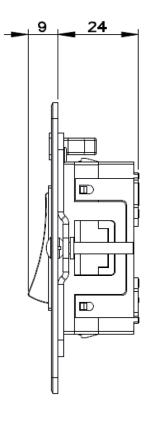

#### NOTE

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.