


Collection	Finish	Product
Penthouse	Polished Brass	Dimmers

Penthouse Collection 13amp Socket Outlets

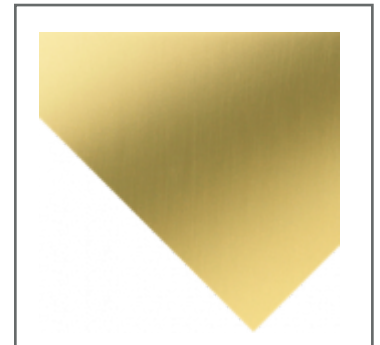

Specified in Polished Brass

Description

Rotary dimmers, suitable for use with LED and resistive load lighting dependant on module. These are push on/push off switch dimmers which act at any pre-selected brightness setting. They have two-way switching that may be used with a normal two-way switch elsewhere or intermediate switch. The secondary switch will not act as a dimmer but only on/off function.

Standards, Approvals & Directives

Comply with
 BS-EN 60669-2-1
 EN-55015
 CE Marked

Features

- Push On/Push Off, rotary dimming control
- All products clearly printed with BS No's, ratings, etc
- Complementary control knobs are supplied with the cover plates
- Available in all The Penthouse Collection finishes
- 1 - 4 Gang available (1-2 Single, 3-4 Twin)

Finishes

All finishes are individually inspected by the Wandsworth Group, a sign of the high standard we have set for The Penthouse Collection.

Availability

We recommend that Single section plates should not exceed 500 watts load and Twin section plates should not exceed 1000 watts load. Failure to comply with this may result in overheating of dimmer modules and units themselves.

Recommended Box Depth

42mm
 Metal Boxes to BS4662

Ordering

When ordering please state in tabular form your requirements for plates/ finishes, interior assemblies and boxes.

Catalogue Numbers:

- P431/G431** - 1G Dimmer Plate & Knob/Grid
- P418/G431** - 2G Dimmer Plate & Knob/Grid
- P419/G419** - 3G Dimmer Plate & Knob/Grid
- P420/G420** - 4G Dimmer Plate & Knob/Grid

Modules

- RTD120**—LED dimmer 5-120W
- RLD300**—resistive load 40-300W
- RAD**—1-10V Controller
- ROO**—on/off module (dummy dimmer)

For dimensional/technical information on modules please see individual data sheets.

Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Collection	Finish	Product
Penthouse	Polished Brass	Dimmers


P431/G431 - 1G Dimmer - Single Plate shown

Recommended Box Depth:

35 mm

Metal Boxes to BS4662.

Not suitable for dry liner/fast fix or surface boxes.

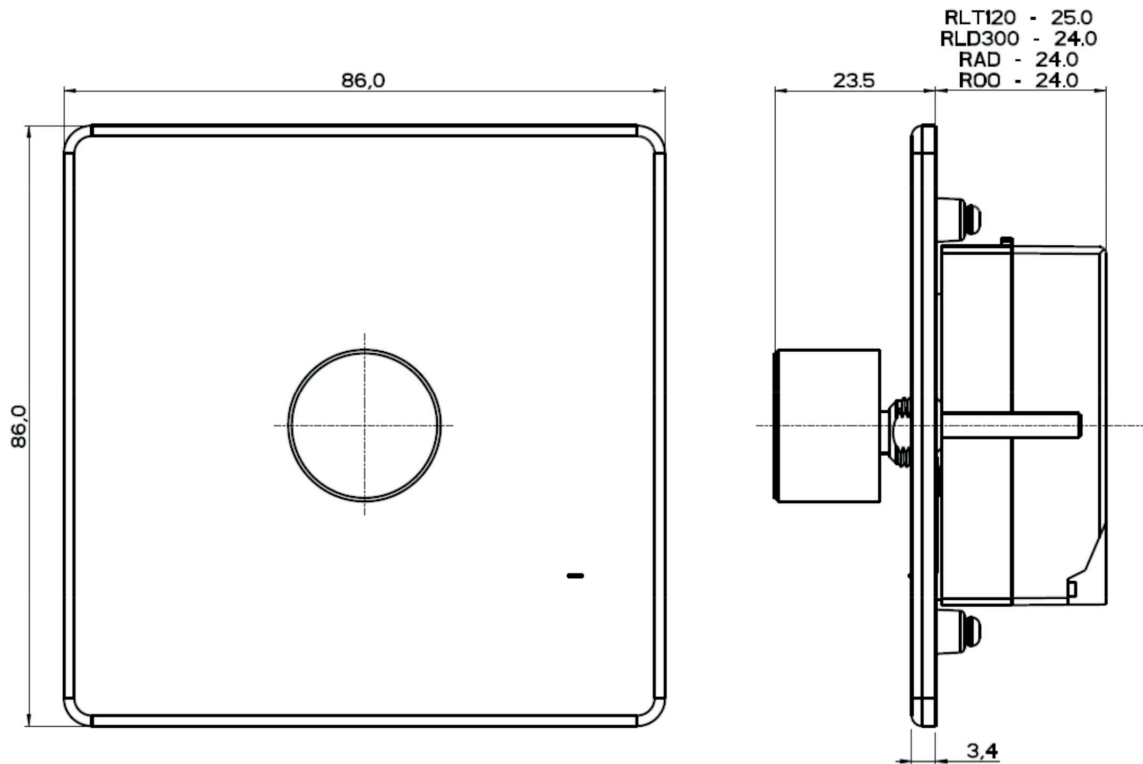

NOTE:

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.