

| Collection | Finish         | Product          |
|------------|----------------|------------------|
| Infinity   | Polished Brass | Connection Units |

## Infinity Collection Connection Units



Specified in Polished Brass

### Description

A range of 13Amp fused connection units have been designed for the connection of refrigerators, water heaters, central heating boilers and other fixed appliances.

All units have been designed with ease of installation in mind and have the advantageous design features and quality of the Infinity Collection.

### Standards, Approvals & Directives

BS 1363

### Features

- Fused connection units have a retained fused carrier that is not removed during fuse replacement.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish.
- All neon indicators are integrally wired into the product and do not require separate connection when installing.
- Red plastic rocker switches available.

### Ordering

When ordering please state in tabular form your requirements for plates/finishes, interior assemblies and boxes.

**ILLUMINATED** – Neon indicators are available on switched fused connection and un-switched fused connection units.

Integral cable outlet only available on switched versions.

Stand alone un-fused cable outlet is available (not shown).

### Recommended Box Depth:

Switched Fused Connection Unit - 35mm

Switched Fused Connection Unit with Neon - 35mm

Switched Fused Connection Unit with Cable Outlet - 35mm

Switched Fused Connection Unit with Cable Outlet and Neon - 35mm

Metal boxes to BS4662

### Availability

13Amp Fused Connection Units are available as the following units:

#### NON-ILLUMINATED:

**P966/\*, A966/\*** - Switched Fused Connection Unit

**P966/\*, A967/\*** - Switched Fused Connection Unit with Cable Outlet

**P901/\*, A953/\*** - Fused Connection Unit

**P978/\*, A978/\*** - Un-Fused Cable Outlet Only (not shown)

#### ILLUMINATED:

**P966/\*, A968/\*** - Switched Fused Connection Unit with Neon

**P966/\*, A969/\*** - Switched Fused Connection Unit with Neon and Cable Outlet

**P901/\*, A954/\*** - Fused Connection Unit

#### \* Interior Finishes available:

/B – Black, /W - White


#### NOTE:

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.

| Collection | Finish         | Product          |
|------------|----------------|------------------|
| Infinity   | Polished Brass | Connection Units |

### TECHNICAL SPECIFICATION

| Supply Voltage | Current Rating | Terminal Capacity   | Ambient Operating Temperature | Max Installation Altitude | IP Rating |
|----------------|----------------|---|-------------------------------|---------------------------|-----------|
| 250V AC        | 13 Amps        | Live, Neutral & Earth<br>3 x 2.5mm <sup>2</sup><br>2 x 4mm <sup>2</sup><br>1 x 6mm <sup>2</sup> | -5°C to +40°C                 | 2000 meters               | IP2XD     |

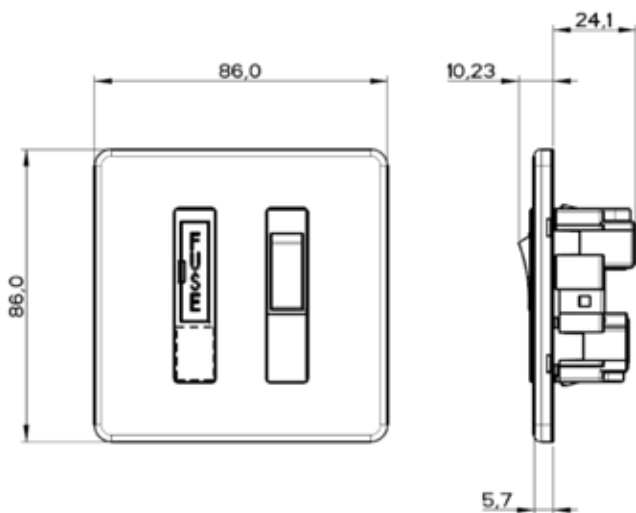


#### Switched Fused Connection Unit

**Depth:**

- Switched Fused Connection Unit – 25mm
- Switched Fused Connection Unit with Neon – 25mm
- Switched Fused Connection Unit with Cable Outlet – 25mm
- Switched Fused Connection Unit with Cable Outlet and Neon – 25mm

**Recommended Box Depth:**

- Switched Fused Connection Unit – 35mm
- Switched Fused Connection Unit with Neon – 35mm
- Switched Fused Connection Unit with Cable Outlet – 35mm
- Switched Fused Connection Unit with Cable Outlet and Neon – 35mm

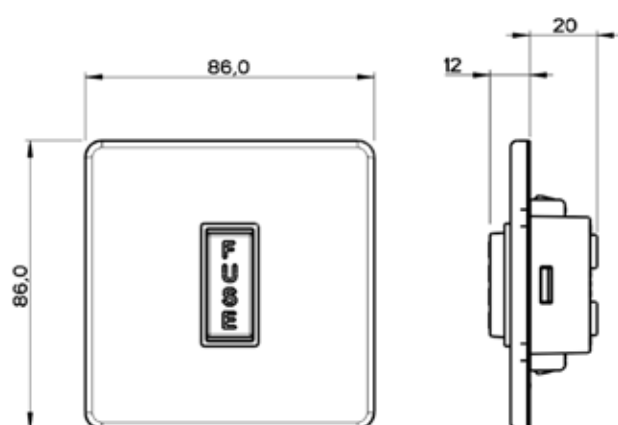

#### Non-switched Fused Connection Unit Illuminated or Non-illuminated

**Depth:**

- Fused Connection Unit – 20mm
- Fused Connection Unit with Neon – 20mm
- Un-fused Cable Outlet Only - 34mm

**Recommended Box Depth:**

- Fused Connection Unit – 35mm
- Fused Connection Unit with Neon – 35mm
- Un-Fused Cable Outlet - 35mm