

Crystal Collection - 13amp Socket Outlets



Standards, Approvals & Directives

Comply with BS 1363-2: 1995 (Amd 1-3)

Independent test certificates are held as follows:

- Panel Mounted 1 Gang Switched and 2 Gang Switched Socket Outlets - Certificate No: C12/43399-1

Description

A collection of socket outlets have been designed for ease of installation, all having the superior quality and design features of the Crystal Collection.

These products can quickly replace an existing 13 amp socket (assuming suitable mounting box is already in position).

Finishes

All plate finishes are individually inspected by the Wandsworth Group, a sign of the high standard we have set for the Crystal Collection.

The 13amp sockets are available in Red, Blue, Black and White moulded polycarbonate housings.

0.5mm 'backing plates' of primed aluminium sit behind the clear plate and can be decorated to suit the surrounding walls, giving the illusion that the wallpaper or painted finish runs seamlessly behind the Crystal plate.



Features

- Metal rocker switches available on switched versions.
- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

Ordering

When ordering please state in tabular form your requirements for plate, interior and box.

E.g. P354/CL/PB - Twin Switched Socket plate (clear acrylic)

A354/B/PB - Twin Switched Socket interior assembly Black Moulding and polished brass switch.

1702 - box, flush (metal)


Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Tel: +44(0)1483 713 400

Email: sales@wandsworthgroup.com

Crystal Collection - 13amp Socket Outlets

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

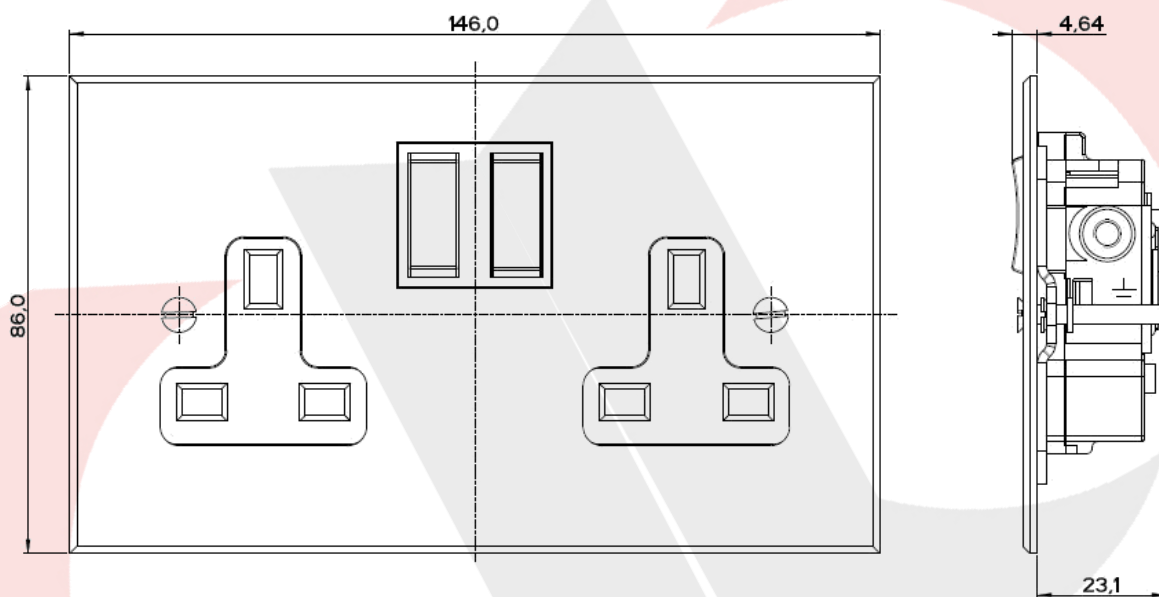

13Amp Twin Switched Socket Outlet

Depth:

Twin Switched Socket – 23mm

Recommended Box Depth:

35mm Minimum

Metal boxes to BS4662

Availability

Switched:

P374/CL/*, A374/* - Single, Rear Entry, Single Pole,

P354/CL/*, A354/D/* - Twin, Rear Entry, Double Pole, Dual Earth