

Infinity Collection - 13amp Socket Outlets

Standards, Approvals & Directives

Comply with BS 1363-2:1995 (Amd 1-3)
Nemko Test certificate: C12/43399-1

Description

A range of socket outlets have been designed for ease of installation, all having the superior quality and design features of The Infinity Collection.

These products can quickly replace an existing 13 amp socket (assuming suitable mounting box is already in position).

Features

- Matching metal rocker switches available (excluding /YEP)
- Un-switched sockets available.
- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.
- Red plastic rocker switches available.

Finishes

We offer 13 superb finishes from stock and an additional 6 in-house metal finishes that are available within a four-week lead time. All finishes are individually inspected by the Wandsworth Group. This ensures the highest standard is achieved. (Refer to the catalogue for more information)

The 13amp sockets are available in Red, Blue, Black and White moulded polycarbonate housings.



Availability

13amp Un-switched:

P923/*, A923/* - Single, Rear Entry, Single Pole

13amp Switched:

P925/*, A925/* - Single, Rear Entry, Single Pole

P924/*, A924/D/* - Twin, Rear Entry, Double Pole, Dual Earth

* Interior Finishes available:

/B – Black, /W - White, /R - Red

Ordering


When ordering please state in tabular form your requirements for plates/finishes, interior assemblies and boxes.

Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Tel: +44(0)1483 713 400
Email: sales@wandsworthgroup.com

Infinity Collection - 13amp Socket Outlets

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

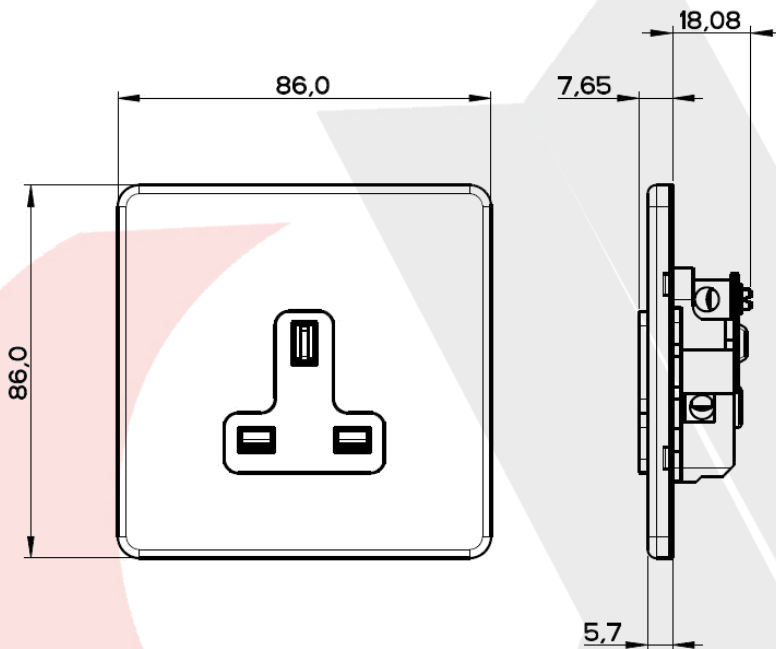


13Amp Single Un-Switched Socket Outlet

Depth:

Single Un-Switched, Rear entry, Single Pole - 19 mm

Recommended Box Depth:

35 mm
Metal boxes to BS4662

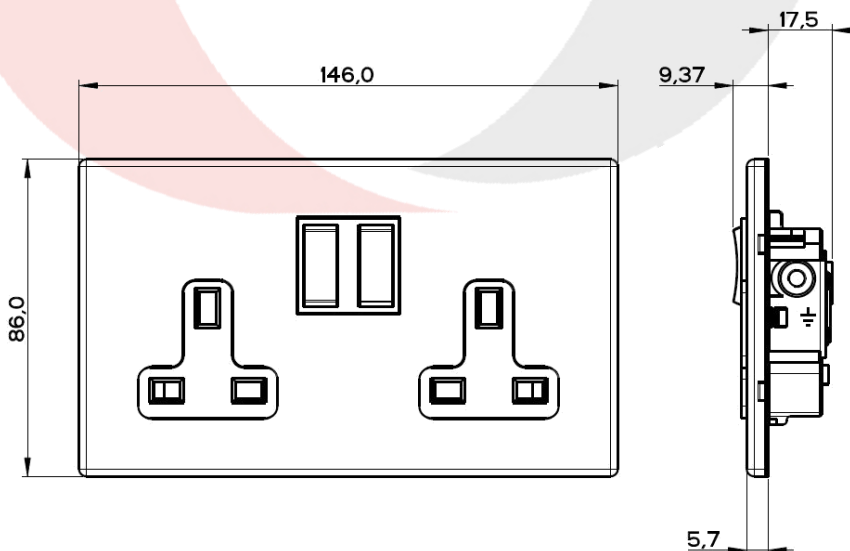

13Amp Twin Switched Socket Outlet

Depth:

Twin Switched, Rear Entry, Single Pole, Dual Earth - 18 mm

Recommended Box Depth:

35 mm
Metal boxes to BS4662