

# Penthouse Collection - Connection Units

## Standards and Approvals

BS 1363

## Description

A range of 13A fused connection units have been designed for the connection of refrigerators, water heaters, central heating boilers and other fixed appliances.

All units have been designed with ease of installation in mind and have the advantageous design features and quality of The Penthouse Collection.

**Illuminated** – Neon indicators are available on switched fuse connection and fuse connection units, with or without the option of a cable outlet.

**Non-Illuminated** – available in switched fuse connection and fuse connection units, with or without the option of a cable outlet.

## Features

- Fused connection units have a retained fuse carrier that is not removed during fuse replacement.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish (excluding /YEP).
- All neon indicators are integrally wired into the product and do not require separate connection when installing.
- Red plastic rocker switches available.



## Availability

13Amp Fused Connection Units are available as the following units:

### NON-ILLUMINATED:

- P466/\*, A466/\*** - Switched Fuse Connection Unit
- P466/\*, A467/\*** - Switched Fuse Connection Unit with Cable Outlet
- P401/\*, A462/\*** - Fuse Connection Unit
- P464/\*, A464/\*** - Fuse Connection Unit with Cable Outlet


### ILLUMINATED:

- P466/\*, A468/\*** - Switched Fuse Connection Unit with Neon
- P466/\*, A469/\*** - Switched Fuse Connection Unit with Neon and Cable Outlet
- P401/\*, A463/\*** - Fuse Connection Unit
- P464/\*, A465/\*** - Fuse Connection Unit with Cable Outlet

\* Interior Finishes available:  
/B – Black, /W - White

# Penthouse Collection - Connection Units

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13Amp
Terminal Capacities:	Live, Neutral and Earth: 3 x 2.5mm <sup>2</sup> 2 x 4 mm <sup>2</sup> 1 x 6 mm <sup>2</sup>
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

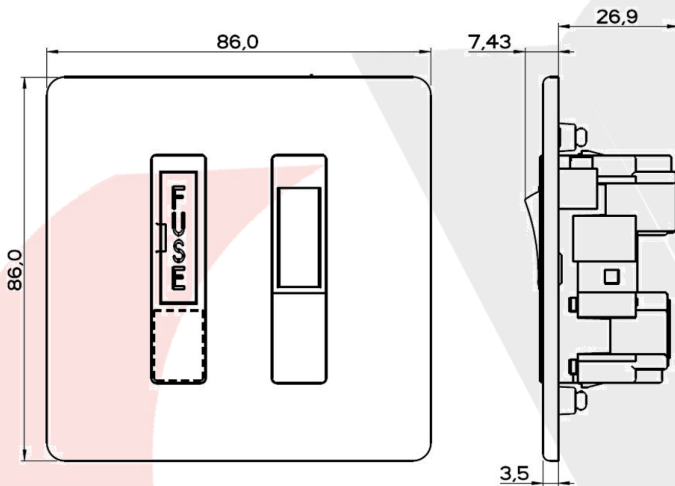

**Switched Fuse Connection Unit**


**Depth:**

- Switched Fuse Connection Unit – 27mm
- Switched Fuse Connection Unit with Neon – 27mm
- Switched Fuse Connection Unit with Cable Outlet – 27mm
- Switched Fuse Connection Unit with Cable Outlet and Neon – 27mm

**Recommended Box Depth:**

- Switched Fuse Connection Unit – 35mm
- Switched Fuse Connection Unit with Neon – 35mm
- Switched Fuse Connection Unit with Cable Outlet – 35mm
- Switched Fuse Connection Unit with Cable Outlet and Neon – 35mm

Metal boxes to BS4662

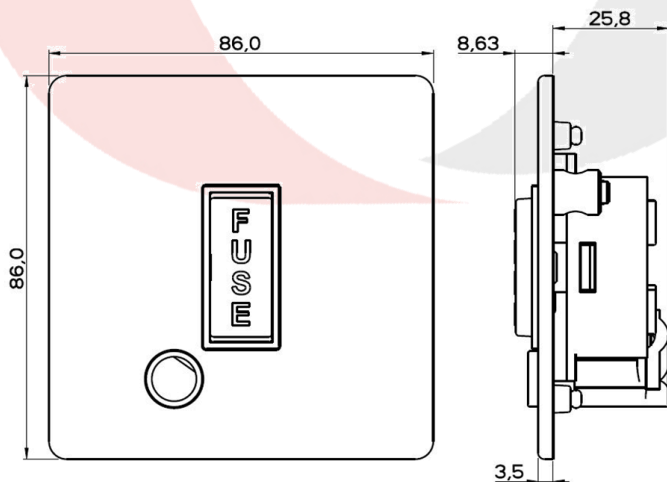

**Fuse Connection Unit with Cable Outlet**

**Depth:**

- Fuse Connection Unit – 26mm
- Fuse Connection Unit with Neon – 26mm
- Fuse Connection Unit with Cable Outlet – 26mm
- Fuse Connection Unit with Cable Outlet and Neon – 26mm

**Recommended Box Depth:**

- Fuse Connection Unit – 35mm
- Fuse Connection Unit with Neon – 35mm
- Fuse Connection Unit with Cable Outlet – 35mm
- Fuse Connection Unit with Cable Outlet and Neon – 35mm

Metal boxes to BS4662