

# Classic Square Corner Collection

## - Non-Standard Isolated Earth Socket Outlets



### Standards, Approvals & Directives

### Description

Wandsworth non-standard sockets are supplied where a non interchangeable facility is necessary, such as mixed voltages and in computer installations.

Non-standard sockets are available with an isolated earth. They are rated at 240V 13Amps AC. For non-domestic use only.

### Features

- Matching metal rocker switches available on all switched versions.
- Un-switched sockets available.
- Terminal markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

### Finishes

All plate finishes are individually inspected by the Wandsworth Group, a sign of the high standard we have set for the Classic Square Corner Collection. All available plate finishes can be found in the Wandsworth catalogue.

The 13amp sockets are available in Red, Blue, Black and White moulded polycarbonate housings.

All brass based plates with a lacquered finish are supplied with a clear gasket to help eliminate any reactions that may occur with the plaster, and damage the quality of the finish.

### Ordering

When ordering please state in tabular form your requirements for plates/finishes, interior assemblies/rocker finish and boxes.

E.g. PSQ12123/PB - 1 Gang Non-Standard 13amp un-switched socket outlet plate, polished brass.

A219/B - 1 Gang Non-Standard 13amp un-switched socket outlet interior assembly Black Moulding, rear entry, Type A

1702 - box, flush (metal)

Please see the Wandsworth Group catalogue for more information and catalogue numbers.


Tel: +44(0)1483 713 400

Email: [sales@wandsworthgroup.com](mailto:sales@wandsworthgroup.com)

# Classic Square Corner Collection

## - Non-Standard Isolated Earth Socket Outlets

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm <sup>2</sup> 3 x 4mm <sup>2</sup> 2 x 6mm <sup>2</sup> (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

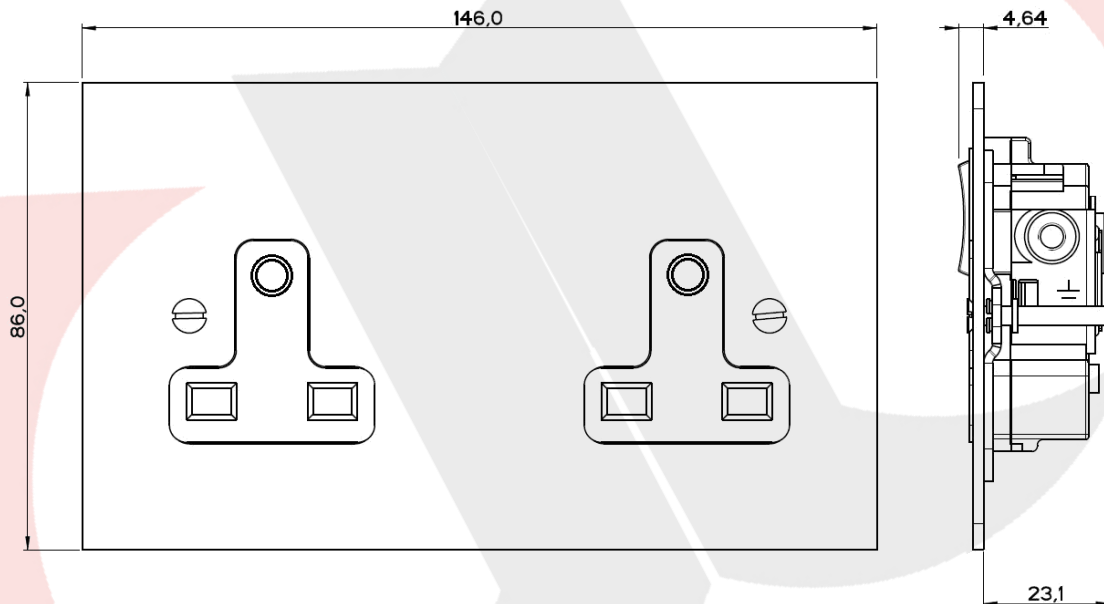

### Availability

#### Non-Standard

##### Un-switched:

**PSQ12123/\*, A219/\*** - Single, Rear Entry Type A

**PSQ350/\*, A353/D/\*** - Twin, Side Entry, Type A, Dual Earth

##### Switched:

**PSQ354/\*, A360/\*** - Twin, Rear Entry, Double Pole, Dual Earth, Type A

**PSQ354/\*, A349/\*** - Twin, Rear Entry, Double Pole, Dual Earth, Type B

### 13Amp Twin Switched Socket Outlet

#### Depth:

Twin Un-Switched Socket – 23mm

Twin Switched Socket – 23mm

Twin Switched Neon Socket – 23mm

#### Recommended Box Depth:

35mm Minimum

Metal boxes to BS4662