
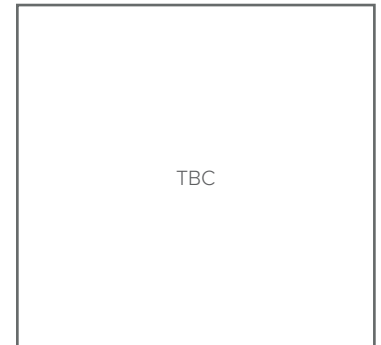
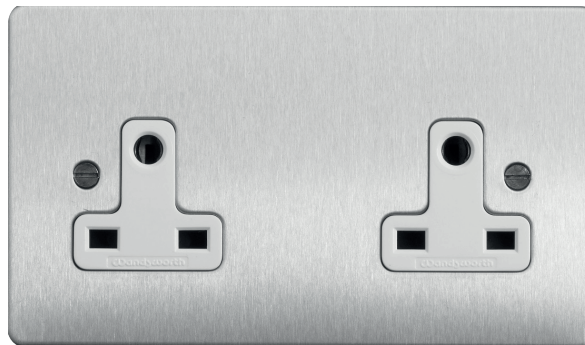


Collection	Finish	Product
Classic	TBC	Non-Standard Isolated Earth Socket Outlets

Classic Collection Non-Standard Isolated Earth Socket Outlets



Description

Wandsworth non-standard sockets are supplied where a non interchangeable facility is necessary, such as mixed voltages and in computer installations.

Standards, Approvals & Directives

Comply with BS 1363-2: 1995 +A4:2014 where relevant

Features

- Matching metal rocker switches available on all switched versions.
- Un-switched sockets available.
- Terminal markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

Finishes

All plate finishes are individually inspected by the Wandsworth Group, a sign of the high standard we have set for the Classic Collection. All available plate finishes can be found in the Wandsworth catalogue.

The 13amp sockets are available in Red, Blue, Black and White moulded polycarbonate housings.

All brass based plates with a lacquered finish are supplied with a clear gasket to help eliminate any reactions that may occur with the plaster, and dam-age the quality of the finish.

Availability

Non-Standard Un-switched:

P12123/*, A219/* - Single, Rear Entry Type A

P350/*, A353/D/* - Twin, Side Entry, Type A, Dual Earth

Switched:

P354/*, A360/* - Twin, Rear Entry, Double Pole, Dual Earth, Type A

Ordering

When ordering please state in tabular form your requirements for plates/ finishes, interior assemblies/rocker finish and boxes.

E.g. P12123/PB - 1 Gang Non-Standard 13amp un-switched socket outlet plate, polished brass.


A219/B - 1 Gang Non-Standard 13amp un-switched socket outlet interior assembly Black Moulding, rear entry, Type A

1702/G - box, flush single size (metal)

Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Collection	Finish	Product
Classic	TBC	Non-Standard Isolated Earth Socket Outlets

TECHNICAL SPECIFICATION					
Supply Voltage	Current Rating	Terminal Capacity	Ambient Operating Temperature	IP Rating	Max Installation Altitude
250V AC	13A per Socket Outlet Live, Terminal	Live, Neutral & Earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² (stranded)	-5°C to +40°C	IP2XD	2000 meters

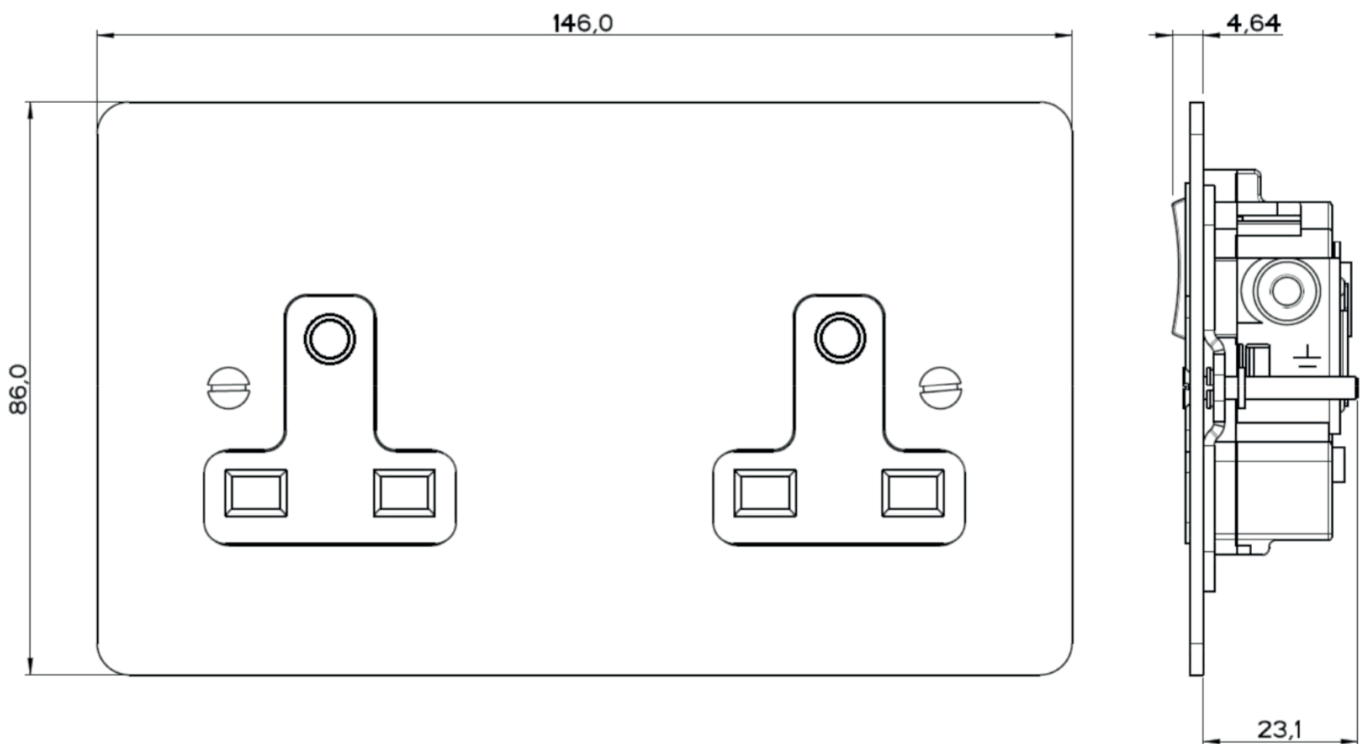

13Amp Twin Switched Socket Outlet

Depth:

- Twin Un-Switched Socket – 23mm
- Twin Switched Socket – 23mm
- Twin Switched Neon Socket – 23mm

Recommended Box Depth:

35mm Minimum

NOTE:

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.