


Collection	Finish	Product
Crystal	TBC	13amp Socket Outlets

The Crystal Collection 13amp Socket Outlets

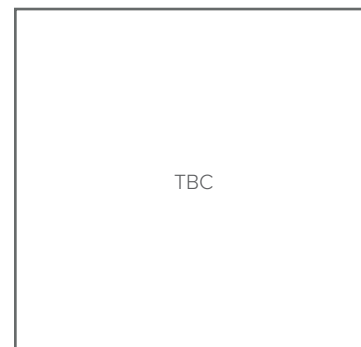

Overview

A collection of socket outlets have been designed for ease of installation, all having the superior quality and design features of the Crystal Collection.

These products can quickly replace an existing 13 amp socket (assuming suitable mounting box is already in position).

Features

- Metal rocker switches available on switched versions.
- Terminal markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

Standards, Approvals & Directives

Comply with BS 1363-2: 1995 (Amd 1-3)

Independent test certificates are held as follows:

Panel Mounted 1 Gang Switched and 2 Gang Switched Socket Outlets - Certificate No: C12/43399-1

Finishes

Metal parts (rockers, dimmer shells, fixing screws etc) are available in 4 finishes only:-

AB, BN1, PB & SN3

The 13amp sockets are available in Red, Blue, Black and White moulded polycarbonate housings.

0.5mm 'backing plates' of primed aluminium sit behind the clear plate and can be decorated to suit the surrounding walls, giving the illusion that the wallpaper or painted finish runs seamlessly behind the Crystal plate.

All finishes are individually inspected by the Wandsworth Group, a sign of the high standard we have set for The Crystal Collection.

Use a 'soft dry cloth' when cleaning front plates.

Recommendations:

The plate sizes used throughout The Crystal Collection are as follows:

Single - 86mm x 86mm

Twin - 146mm x 86mm

Ordering

When ordering please state in tabular form your requirements for plate, interior and box.

E.g. **P354/CL/PB** - Twin Switched Socket plate (clear acrylic) with polished brass fixing screws


A354/D/PB - Twin Switched Socket interior assembly Black Moulding and polished brass switches.

1703 - box, flush (metal)

Collection	Finish	Product
Crystal	TBC	13amp Socket Outlets

TECHNICAL SPECIFICATION

Supply Voltage	Current Rating	Terminal Capacity	Ambient Operating Temperature	Max Installation Altitude	IP Rating
250V AC	13A per Socket Outlet	Live, Neutral & Earth 3 x 2.5mm ² 3 x 4mm ² 2 x 6mm ² (stranded)	-5°C to +40°C	2000 meters	IP2XD

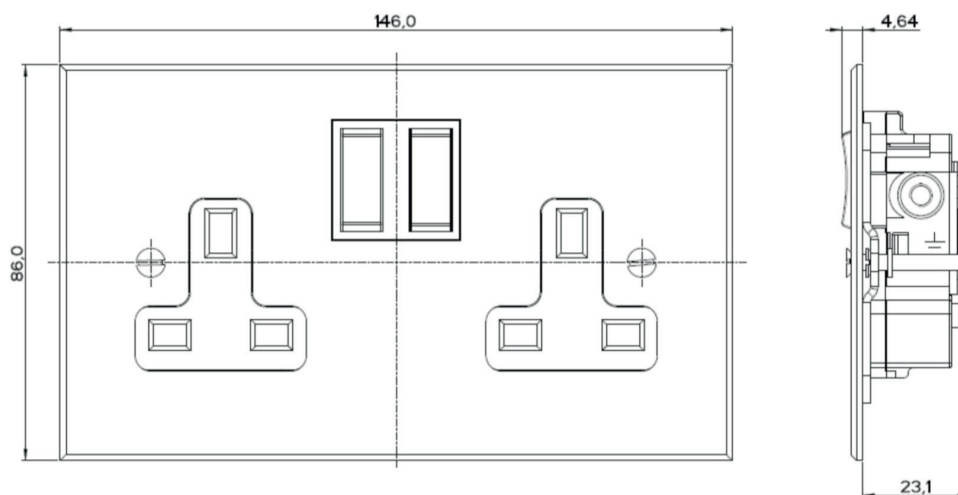

Twin socket shown—plate dimensions—146mm wide x 86mm high

Single socket - plate dimensions—86mm wide x 86mm high (side view is the same as above)

13Amp Switched Socket Outlets

Depth

Single & Twin Switched Socket – 23mm

Recommended Box Depth:

35mm Minimum

Metal boxes to BS4662

Availability

Switched:

P374/CL/*, A374/* - Single, Rear Entry, Single Pole,

P354/CL/*, A354/D/* - Twin, Rear Entry, Double Pole, Dual Earth

Note: The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.