

Collection	Finish	Product
Penthouse	TBC	2 & 5Amp Socket Outlets

## Penthouse Collection 2 & 5Amp Socket Outlets



### Description

A range of round pin socket outlets have been designed for ease of installation, all having the superior quality and design features of The Penthouse Collection.

### Standards, Approvals & Directives

Comply with  
BS 546.

### Features

- Top access terminals making wiring easier and quicker.
- Shutter safety feature.
- Terminal marking present on socket housing for clearer identification.
- Black and White housings available to compliment plate finishes
- Automatic primary switching on insertion of plug

### Availability

Our 2amp and 5amp un-switched sockets are available in Black and White polycarbonate moulded housings and are supplied as interiors with grids throughout the Classic, Infinity, Dimension, Crystal, Heritage and Penthouse Collections.

All plate finishes available. Please see the Wandsworth catalogue for more information.

### Applications & Uses

Our 2amp and 5amp socket outlets can be used for lighting circuits that demand low amperages.

### Ordering

When ordering please state the catalogue number and finish of the required socket outlet.

### Catalogue Numbers

#### Interiors

**A4151/\*** - 2amp Socket Outlet

**A485/\*** - 5amp Socket Outlet

#### Plates

**P4151/\*** - 2amp Plate

**P485/\*** - 5amp Plate

#### Flush Box


**1702/G** (42mm deep)

#### \*Interior Finishes available:

/B – Black, /W - White

Collection	Finish	Product
Penthouse	TBC	2 & 5Amp Socket Outlets

Side view common to all sizes

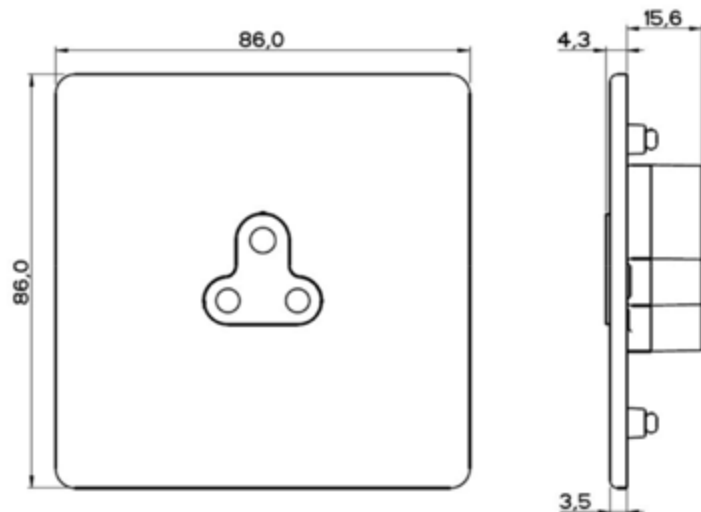

### 2amp Socket Outlet

**Depth:**

2amp Socket – 16mm

**Recommended Box Depth:**


Metal boxes to BS4662

**1.5 mm<sup>2</sup> Cable** – 25mm Box

**2.5 mm<sup>2</sup> Cable** – 35mm Box

Not suitable for dry liner/fast fix or surface boxes.

Side view common to all sizes

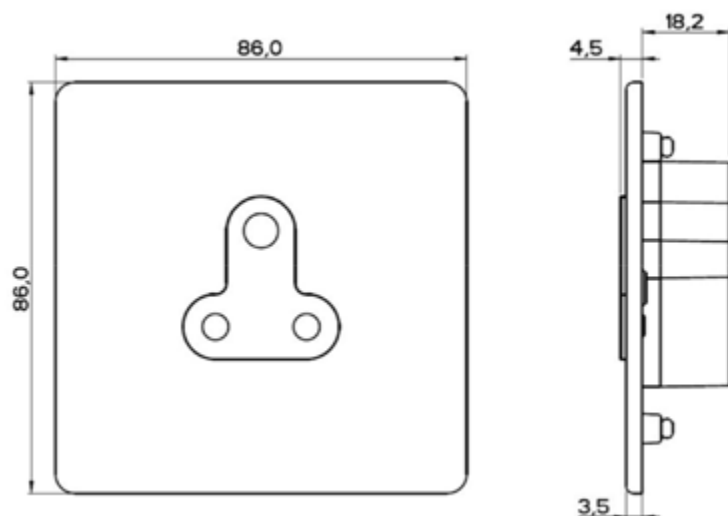

### 5amp Socket Outlet

**Depth:**

5amp Socket – 19mm

**Recommended Box Depth:**

Metal boxes to BS4662

**5amp Socket** – 35mm Box

Not suitable for dry liner/fast fix or surface boxes.

Technical Specification		
Supply Voltage	2 Way - 20 Amp	
Terminal Capacities:	2amp Socket	5amp Socket
	Live, Neutral & Earth 1 x 2.5 mm <sup>2</sup> 2 x 2.0 mm <sup>2</sup> 2 x 1.5 mm <sup>2</sup> 4 x 1.0 mm <sup>2</sup>	Live, Neutral & Earth 1 x 2.5 mm <sup>2</sup> 2 x 2.0 mm <sup>2</sup> 2 x 1.5 mm <sup>2</sup> 4 x 1.0 mm <sup>2</sup>
Ambient Operating Temperature	-5°C to +40°C	
IP Rating	IP2XD	
Max Installation Altitude	2000 meters	

**NOTE:**

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.