


Collection	Finish	Product
Penthouse	Polished Brass	45amp Double Pole Switch

# Penthouse Collection 45amp Double Pole Switch



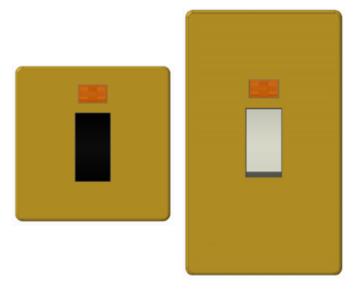

Specified in Polished Brass

# Description

A range of 45amp Double Pole switches have been designed for the connection for domestic cookers and power showers.

All units have been designed with ease of installation in mind and have the advantageous design features and quality of The Penthouse Collection, complete with amber neon indicators.

## Standards, Approvals & Directives

Comply with

BS EN 60669

### **Features**

- The double pole switch has 3mm contact gaps for isolation.
- All terminal and fixing screws are operated by one-sized screwdriver.
- White or Black rockers
- All neon indicators are integrally wired into the product and do not require separate connection when installing.

### Ordering

When ordering please state in tabular form your requirements for plates/finishes, interior assemblies and boxes.

## Catalogue Numbers

Interiors

A0434/\* -Single Gang

A0437/\* - Double Gang

Plates

P0434/\* - Single Plate

P0437/\* - Double Gang

/\* = plate, rocker finish

/\* Denotes plate, rocker finish

Interiors available in /B - Black and /W - White.

see Wandsworth's catalogue for details

# Recommended Box Depth:

45Amp Double Pole Switch - 47mm

Metal boxes to BS4662


Flush Box: 1732/G Single, 1733/G Twin

Not suitable for dry liner/fast-fix or surface boxes


Please see the Wandsworth Electrical catalogue for more information and catalogue numbers.




Collection	Finish	Product
Penthouse	Polished Brass	45amp Double Pole Switch








Side view common to all sizes

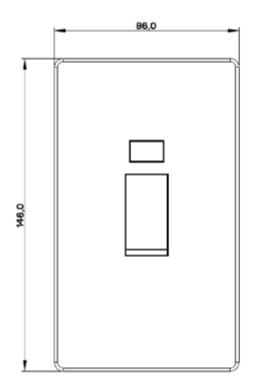



Technical Specification		
Supply Voltage:	250V AC	
Current Rating:	45Amp	
Terminal Capacities:	Live, Neutral and Earth: $2 \times 6 \text{ mm}^2$ $1 \times 10 \text{ mm}^2$ $1 \times 16 \text{ mm}^2$	
Ambient Operating Temperature:	-5°C to +40°C	
IP Rating	IP2X	
Max Installation Altitude	2000 Meters	

#### NOTE

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.