wandsworth | ELECTRICAL

**Date of Issue**: 00/00/00 **Version:** 1 **Ref:** 000000

| Collection | Finish | Product |
|---|---|---|
| Classic | Polished Brass | Classic 32 Amp Double Pole Switch |

# Classic Collection Classic 32 Amp Double Pole Switch

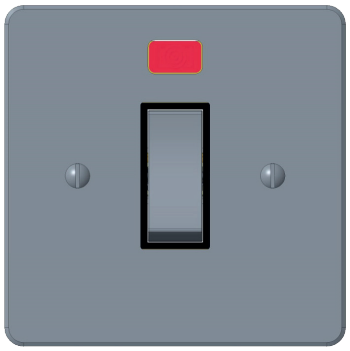

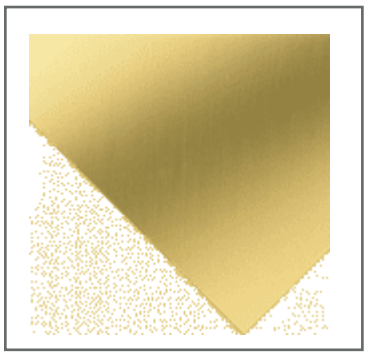

Specified in Polished Brass

## Description

A range of 32amp Double Pole switches have been designed for the connection for domestic cookers and high load devices

All units have been designed with ease of installation in mind and have the advantageous design features and quality of the Classic Collection, complete with red neon indicators.

## Standards, Approvals & Directives

BS EN 60669-1 1999

Nemko Certificate No: C16/48898

## Features

- The double pole switch has 3mm contact gaps for isolation.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish, alternatively available in white or black plastic rockers
- Neon Indicators.

## Ordering

When ordering please state in tabular form your requirements for plates/ finishes, interior assemblies and boxes.

## Catalogue Numbers:

**Interiors: A2032/*/*** - Single Gang

**Plates: P2032/*** - Single Plate

/* Denotes plate, rocker finish

/*/* Optional second asterisk denotes Interior colour Standard Interior Colour will apply unless specified , see Wandsworth's catalogue for details

e.g A2032/PB/W

Polished Brass Rocker with White Interior

**Recommended Box Depth:**

32Amp Double Pole Switch - 42mm

Metal boxes to BS4662

1702/G—Flush single box

| Collection | Finish | Product |
|---|---|---|
| Classic | Polished Brass | Classic 32 Amp Double Pole Switch |

| TECHNICAL SPECIFICATION | | | | | | | |
|---|---|---|---|---|---|---|---|
| Switch Type | Supply Voltage | Current Rating | Terminal Capacity | Ambient Operating Temperature | Max Installation Altitude | IP Rating | No. of Operations |
| Double Pole | 250V AC 50HZ | 13A | 4 x 1mm²<br>4 x 1.5mm²<br>3 x 2.5mm²<br>2 x 4mm²<br>1 x 6mm²<br>1 x 10m² | -5°C to +40°C | 2000 meters | IP2XD | 10,000 |

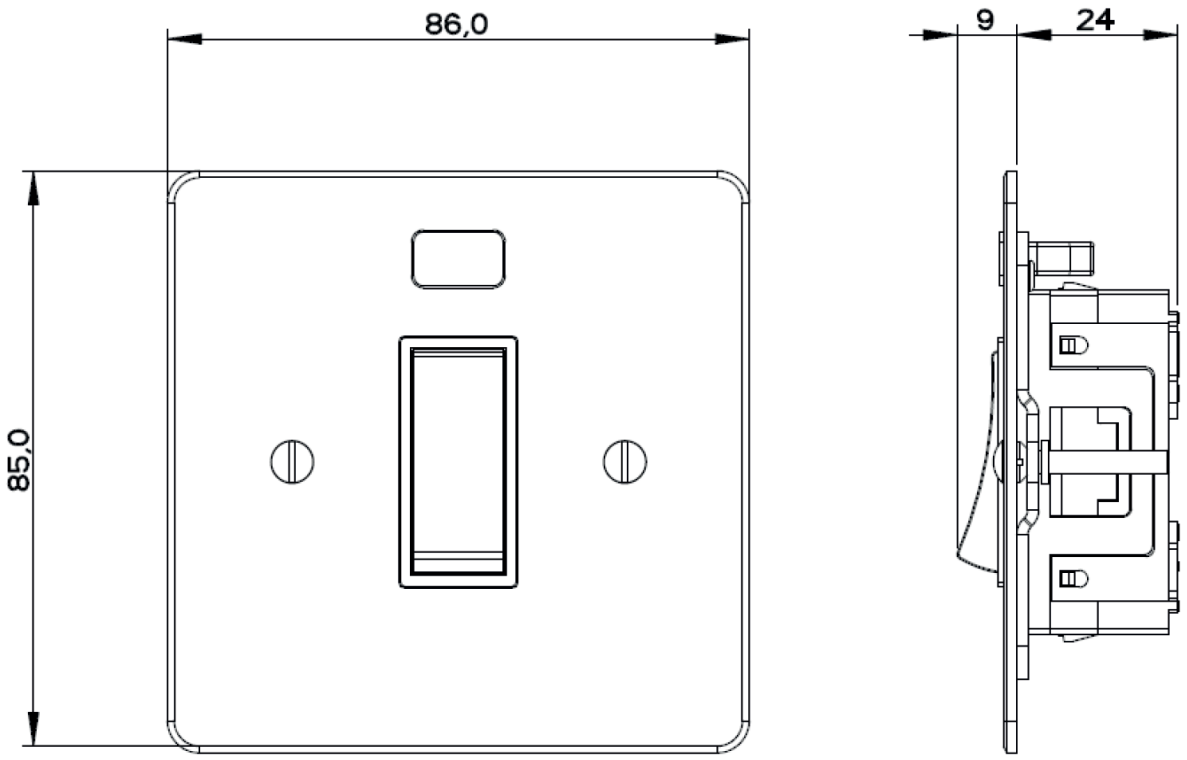


**NOTE:**
The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.