

Classic Collection - 45amp Double Pole Switch

Standards and Approvals

BS EN 60669

Description

A range of 45amp Double Pole switches have been designed for the connection for domestic cookers and power showers.

All units have been designed with ease of installation in mind and have the advantageous design features and quality of the Classic Collection, complete with amber neon indicators.

Features

- The double pole switch has 3mm contact gaps for isolation.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish. Rockers available in: B, BC, PB, SC and W.
- All neon indicators are integrally wired into the product and do not require separate connection when installing.
- Neon Indicators.

Availability

45 Amp Double Pole Switches are available in the following with all the Classic Collection finishes available:

- 1 Gang, Single
- 1 Gang, Twin

For plate /switch finish combinations, please see the Wandsworth catalogue.



Ordering

When ordering please state in tabular form your requirements for plates/finishes, interior assemblies and boxes.

Catalogue Numbers:

Interiors: **A234/*** - Single Gang
A237/* - Twin Gang

Plates: **P234/*** - Single Plate
P237/* - Twin Plate


Tel: +44(0)1483 713 400
Email: sales@wandsworthgroup.com

Recommended Box Depth:
45Amp Double Pole Switch - 47mm
Metal boxes to BS4662

Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Classic Collection - 45amp Double Pole Switch

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	45Amp
Terminal Capacities:	Live, Neutral and Earth: 2 x 6 mm ² 1 x 10 mm ² 1 x 16 mm ²
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2X
Max Installation Altitude:	2000 meters

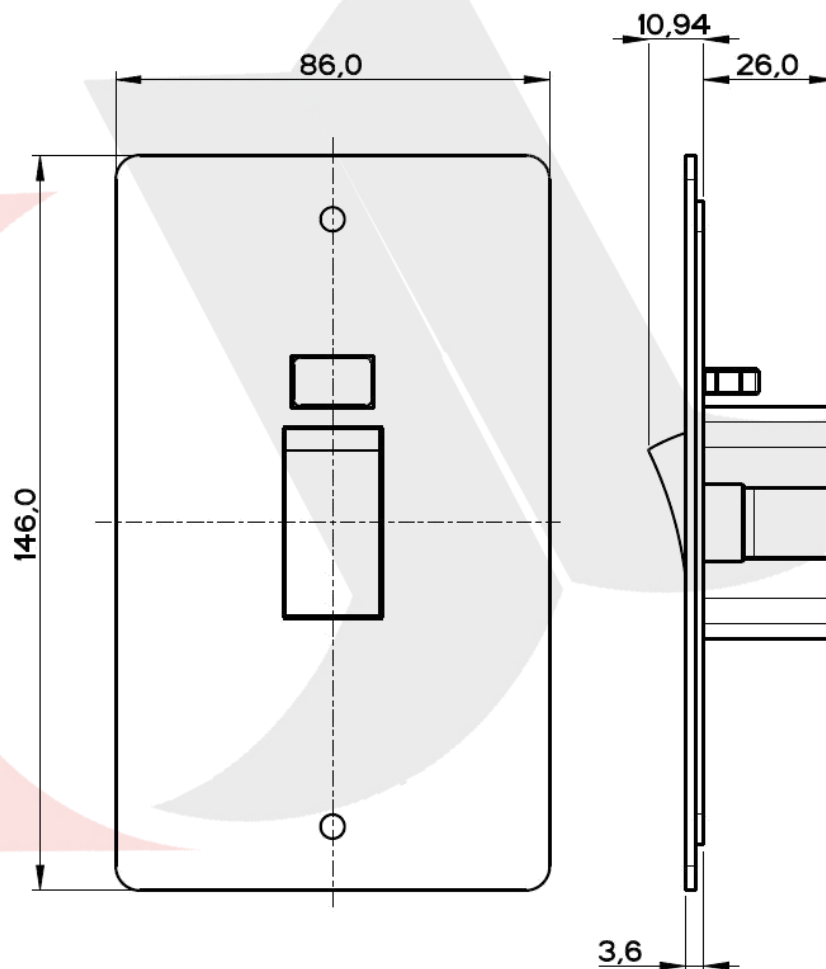

Twin 45amp Double Pole Switch

Depth:

1 Gang, Single – 26mm

1 Gang, Twin – 26mm