

Classic Collection - 32amp Double Pole Switch



Standards and Approvals

BS EN 60669-1 1999

Nemko Certificate No: C16/48898


Description

A range of 32amp Double Pole switches have been designed for the connection for domestic cookers, power showers and high load devices

All units have been designed with ease of installation in mind and have the advantageous design features and quality of the Classic Collection, complete with red neon indicators.

Features

- The double pole switch has 3mm contact gaps for isolation.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish, alternatively available in white or black plastic rockers
- Neon Indicators.

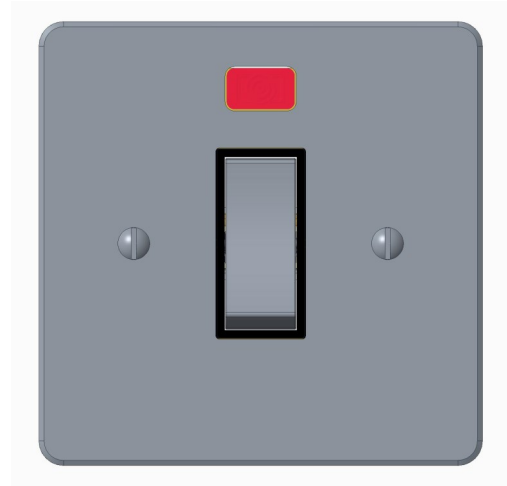

Ordering

When ordering please state in tabular form your requirements for plates/finishes, interior assemblies and boxes.

Catalogue Numbers:

Interiors: A2032/*/* - Single Gang

Plates: P2032/*- Single Plate

/* Denotes plate, rocker finish

/*/* Optional second asterisk denotes Interior colour
Standard Interior Colour will apply unless specified, see
Wandsworth's catalogue for details

e.g A2032/PB/W

Polished Brass Rocker with White Interior

Recommended Box Depth:

32Amp Double Pole Switch - 42mm
Metal boxes to BS4662

Tel: +44(0)1483 713 400

Classic Collection - 32amp Double Pole Switch

Technical Specification	
Switch Type	Double Pole
Voltage Rating:	250V AC, 50Hz
Current Rating:	32A
Terminal Capacities:	4 x 1mm ² 4 x 1.5mm ² 3 x 2.5mm ² 2 x 4mm ² 1 x 6mm ² 1 x 10m ²
Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max. Installation Altitude:	2000 Meters
No. of Operations:	10,000

