
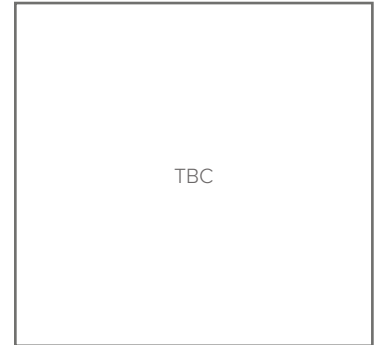


Collection	Finish	Product
Penthouse	TBC	32amp Double Pole Switch

Penthouse Collection 32amp Double Pole Switch

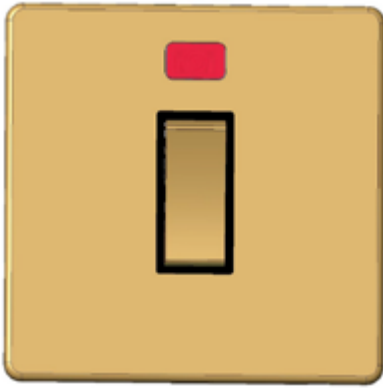

Description

A range of 32amp Double Pole switches have been designed for the connection for domestic cookers and power showers and high load devices.

All units have been designed with ease of installation in mind and have the advantageous design features and quality of The Penthouse Collection, complete with red neon indicators.

Standards, Approvals & Directives

Comply with

Nemko Certificate No: C16/48898

Features

- The double pole switch has 3mm contact gaps for isolation.
- All terminal and fixing screws are operated by one-sized screwdriver.
- Metal rockers to suit plate finish, alternatively available in white or black plastic rockers
- Neon indicator

Ordering

When ordering please state in tabular form your requirements for plates/ finishes, interior assemblies and boxes.

Catalogue Numbers

Interiors

A4032/* - Single Gang

Plates

P4032/* - Single Plate

/* = plate, rocker finish

/*/* Optional second asterisk denotes Interior colour Standard Interior Colour will apply unless specified, see Wandsworth's catalogue for details

e.g A4032/PB/W

Polished Brass Rocker with White Frame

Recommended Box Depth:



32Amp Double Pole Switch - 42mm

Metal boxes to BS4662

Flush Box—1702/G

Collection	Finish	Product
Penthouse	TBC	32amp Double Pole Switch

Side view common to all sizes

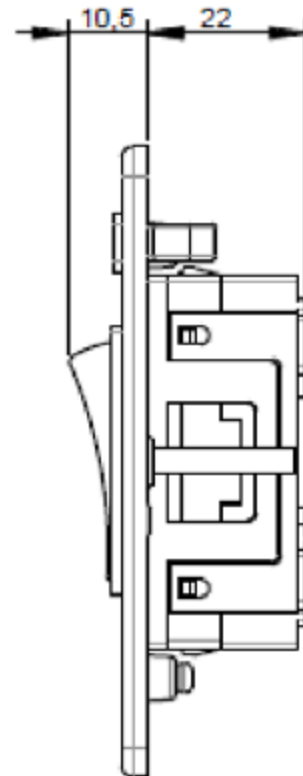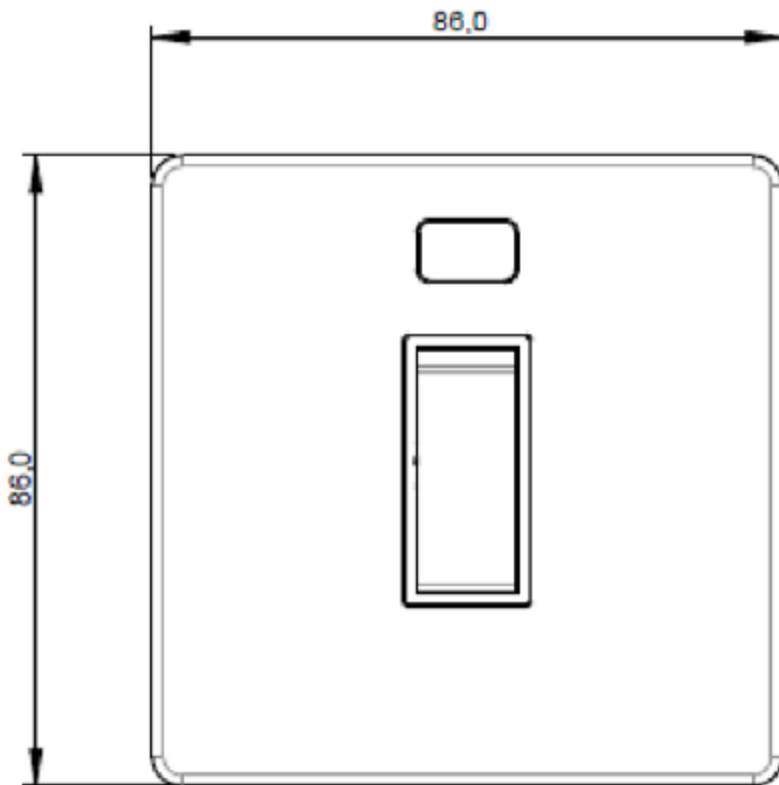

Technical Specification	
Switch Type	Double Pole
Voltage Rating	250V AC, 50Hz
Current Rating:	32A
Terminal Capacities:	4 x 1mm ² 4 x 1.5mm ² 3 x 2.5mm ² 2 x 4mm ² 1 x 6mm ² 1 x 10mm ²
Operating Temperature:	-5°C to + 40°C
IP Rating	IP2XD
Max Installation Altitude	2000 Meters
No. of Operations:	10,000

NOTE:

The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.