
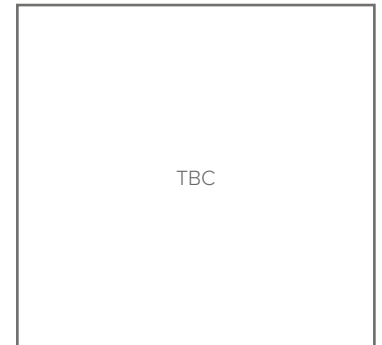
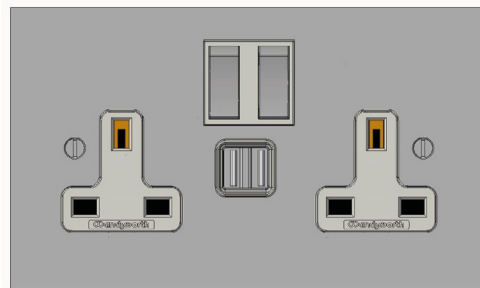


Collection	Finish	Product
Square Edged	TBC	Twin Switched 13Amp Outlet with 3.1Amp USB

Square Edged Twin Switched 13Amp Outlet with 3.1Amp USB

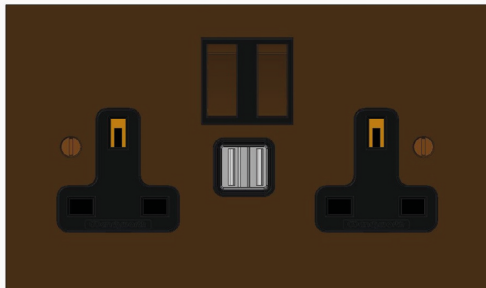

Description

A range of socket outlets with USB have been designed for ease of installation, all having the superior quality and design features of the Square Edged Collection.

These products can quickly replace an existing 13 amp sockets 35mm back box required.

USB charger capability ideal for charging iPad, iPhone, tablets, mobiles, cameras and more.

Features

- Matching metal rocker switches available on all switched versions.
- Terminals markings present on housing for clearer identification.
- Double pole switches.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers
- 2 Type A USB sockets - 3.1A total output, shared across both sockets.
- When only one device is plugged in the whole 3.1A is available for rapid charging.
- Automated USB overload protection that resets when overload removed.
- Automatic short circuit protection.
- When both USB sockets are in use, the output is automatically proportioned according to demand.
- High efficiency voltage conversion of 83% or better.

Finishes

The 13amp sockets are available in Black and White moulded polycarbonate housings.

All brass based plates with a lacquered finish are supplied with a clear gasket to help eliminate any reactions that may occur with the plaster, and damage the quality of the finish.

Ordering

When ordering please state in tabular form your requirements for plates/ finishes, interior assemblies/rocker finish and boxes.

E.g. For polished brass finish:-

Plate - PSQ3157/PB - Twin 13 Amp switched socket and USB outlet plate, in polished brass.

Interior - A3157/PB/B - Twin 13amp switched socket outlet with USB assembly, Black Moulding, rear entry, double pole, polished brass rockers

Box - 1703/G - Flush box (metal)

Please see the Wandsworth Group catalogue for more information and catalogue numbers.

Standards, Approvals & Directives

BS 5733: 2010 +A1:2014


BS EN 60950-1:2006+A2:2013

BS 1363-2: 1995 +A4:2014

Note: Please note these images are representative only

Collection	Finish	Product
Square Edged	TBC	Twin Switched 13Amp Outlet with 3.1Amp USB

Technical Specification	
Supply Voltage:	250V AC
Current Rating:	13 Amps
Terminal Capacities:	Live, Neutral & Earth
	3 x 2.5 mm ²
	3 x 4 mm ²
	1 x 6 mm ²
Ambient Operating Temperature:	-5°C to +40°C
Max Installation Altitude	IP2XD
Switch Type	Double Pole
USB Output	5v dc 3.1 Amps
Stand-by power	<0.15W

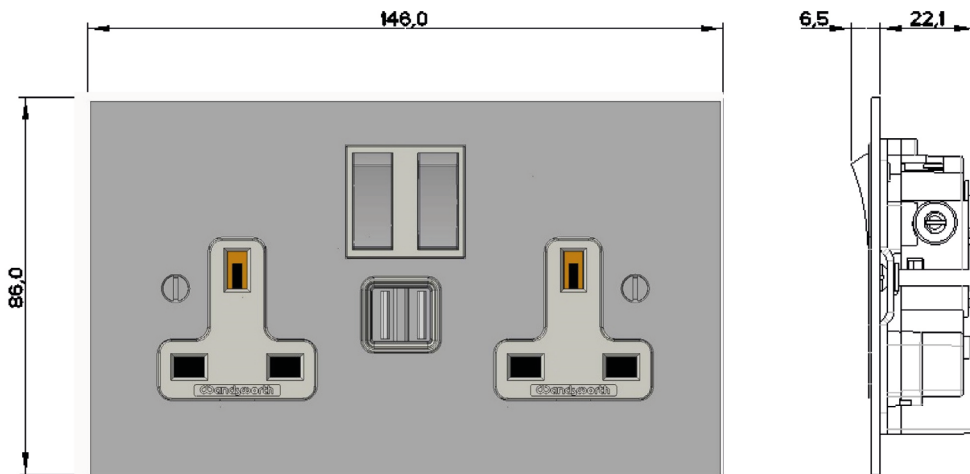

13Amp Twin Socket with USB

Depth:
13Amp Twin Socket with USB– 23mm

Recommended Box Depth:
35mm Minimum
Metal boxes to BS4662

Note: The Company Policy is one of continuous improvement and the right to change designs, dimensions, descriptive matter, etc., at any time without notice is reserved.